FRM BSM BB

FRAMMENTO Tap Range Frammento Bath Shower Mixer

Brushed Brass



Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend brushed brass finish to make a statement in your bathroom.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10-year parts and 1 year labour guarantee for peace of mind.
- Also available in chrome, black and gun metal.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.


Product Certifications:


SH


-

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Flat Angled			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M24 Recessed Honeycomb Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Short Stem Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Dimensions (measurements in mm)

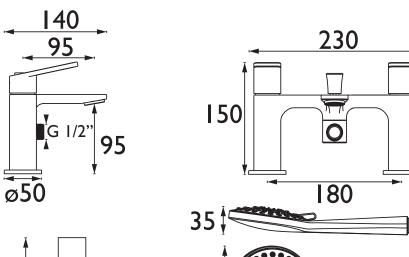





D1

	Flow Rates (I/min)							
	System Pressure (bar)	0.3	0.5	1	2	3	5	
Water Label	Through Bath Filler (mixed)	9.6	15.8	23.4	33.4	40.7	52.5	
	Through Handset (mixed)	3.9	5.1	7.5	11	14	18.6	
TECHNICAL	R QUALIA R QUALIA							
DATA (5 (10 ²			RK		AN N		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

RANT

ARANT

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 ear guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.